




JUREN PRODUCT MANUALS


www.jurendianli.com

JR-19-10-A/0


RL

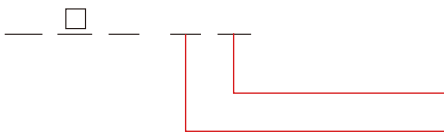


- 0.5VA 5A
- a 3% = (5 -)
× 100%
- b 5 4%
- c - 10 50 5%
- d 80 110% 4%
- 1. 1 30ms 2 20ms
- 0.85 0.95
- 27ns
- 250V 1A 5ms ± 0.75ms
50W 250V 5A cos φ = 0.4 ± 0.1
500VA 5A 5 × 10⁴
- 2KV 1 50HZ




RL-11




RL-12




RL-13




RL-21




RL-22




RL-23



RL-31



RL-32











RL-33

- RL-10 1
- RL-20 2
- RL-30 3

mm

1			
1			

mm

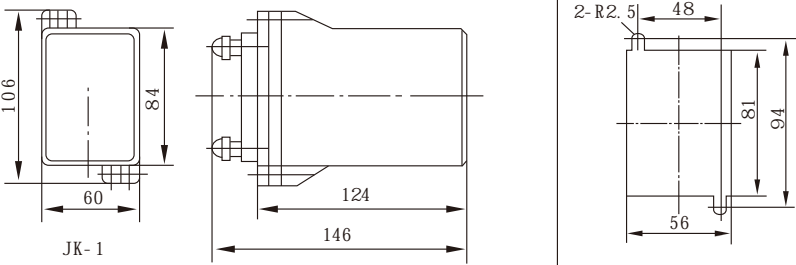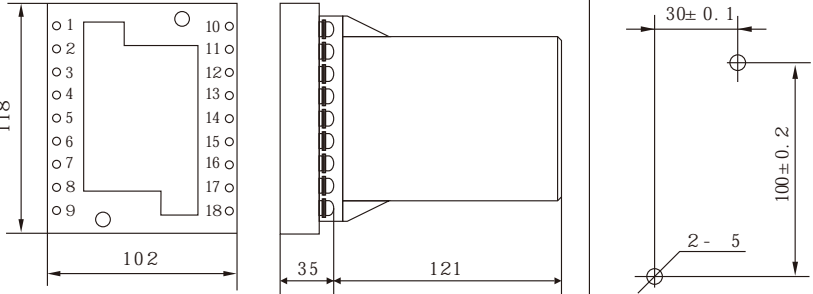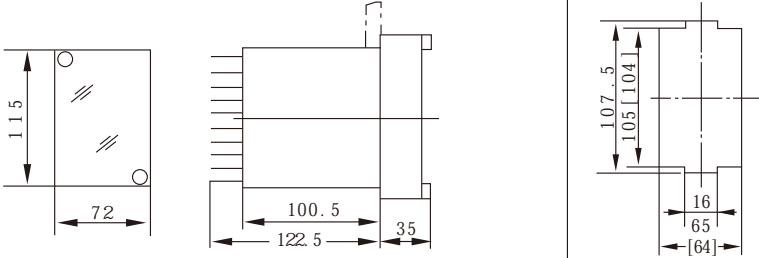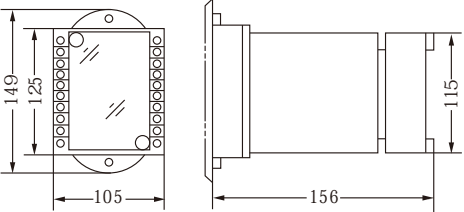2 JK-1		
2 JK-1Q		
3 A11K (JK-11K)		
3 A11Q JK-11Q		

ABOUT US
JUREN POWER

1999

