



JUREN PRODUCT MANUALS

www.jurendianli.com


JR-19-10-A/0

RL-DS

RL-DS ()




35mm

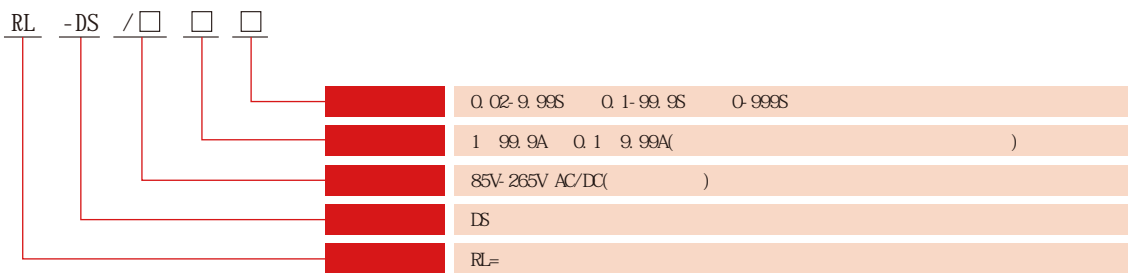

: RL-DS/85-265V DC 1-99.9A 0.02-9.99S




- 5A 50Hz
- 85V 265V AC/DC
-
- a 1-99.9A 0.1A 0.1-9.99A 0.01A
- b 0.02-9.99S 0.01S (0.1-99.9S 0.1S 0-999S 1S
-
- a 3% = (5 -) /
- × 100%
- b 5 4%
- c -10 50 5%
- d 0.1%+40ms

- 0.85 0.95
- 27ms
- 250V 1A 5ms ± 0.75ms
- 50W 250V 5A cos = 0.4 ± 0.1
- 500VA 5A 5 × 10⁻⁴
- 1.5VA(5A)
- 50HZ
- 2KV 1

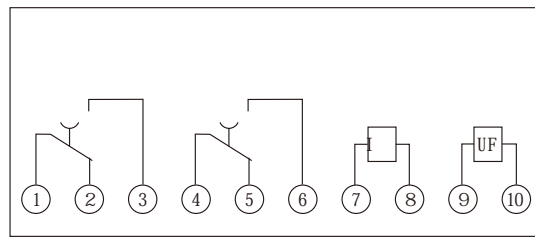

RL- DS

UF

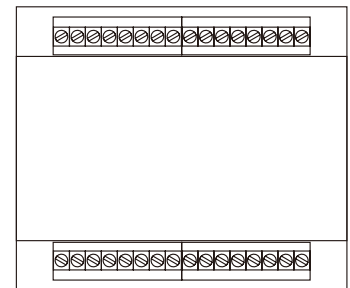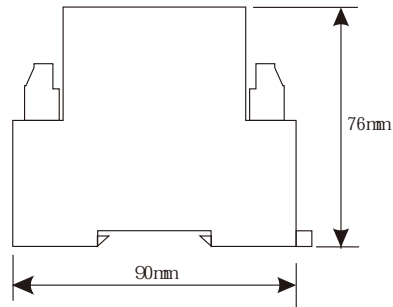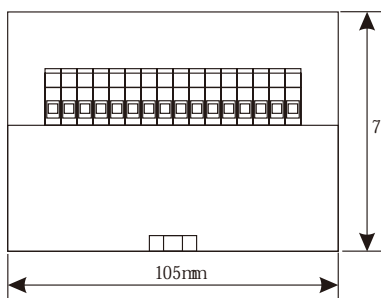

JR-D2

ABOUT US
JUREN POWER

1999

